



广州先越宝仑电子科技有限公司


Adsmart Technology Ltd.

广州市番禺区番禺大道北555号番禺节能科技园天安总部中心15号楼408
Rm.408,Building 15,Headquarters Center,Tian An Hi-Tech Ecological Park,
No.555,Panyu Avenue N. , Panyu District, Guangzhou, China
Tel: 020-39218917-828 Fax: 020-3921-8997
<http://www.adsmart.com.cn>

AST2K02E-MU7

Bluetooth Weather Clock Module for Mirror Wi-Fi (English)

Appearance

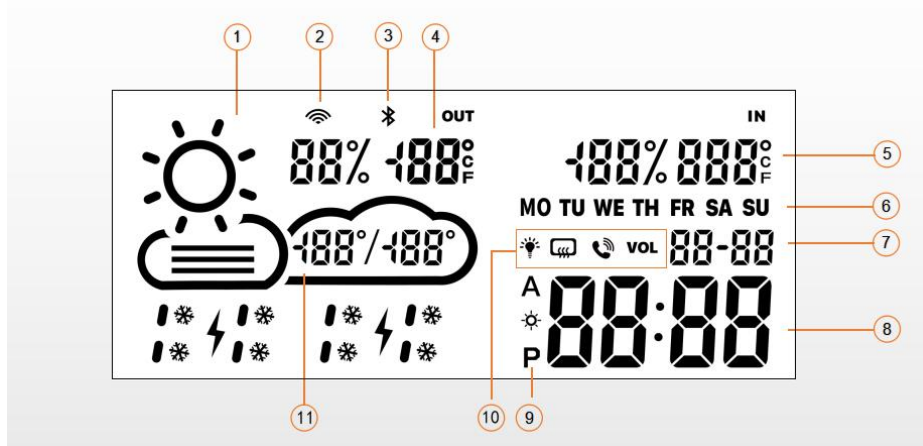

1. Internet real-time weather report
2. Wi-Fi icon
3. Bluetooth
4. Outdoor humidity and temperature
5. Room temperature
6. Week
7. Date
8. Time
9. 12/24 hours
10. From left to right: mirror light, anti-fog, caller ID, volume
11. Real-time temperature range

Features

1. 7.3-inch LED display
2. Mirror light switch; infinite brightness changing; Three color temperature switches.
3. Anti-fog independent switch function
4. Bluetooth Speaker
5. key operated LED display switch
6. Automatically turn off the anti-fog at 1 hour intervals
7. Wi-Fi access for accurate time, date
8. Wi-Fi reception of real-time weather forecasts (weather conditions for the day, temperature and humidity, temperature range)
9. Room temperature testing



广州先越宝仑电子科技有限公司

Adsmart Technology Ltd.

广州市番禺区番禺大道北555号番禺节能科技园天安总部中心15号楼408
Rm.408,Building 15,Headquarters Center,Tian An Hi-Tech Ecological Park,
No.555,Panyu Avenue N. , Panyu District, Guangzhou, China
Tel: 020-39218917-828 Fax: 020-3921-8997
<http://www.adsmart.com.cn>

10. Weather forecast for today and tomorrow (optional)
11. Adjustable LED brightness
12. LED night mode
13. Firmware upgrade functionality
14. WiseMirror APP Intelligent Control
15. Single band output, maximum current 5A
16. Mirror thicknesses are supported at 3mm, 4mm and 5mm
17. Power-down memory function

Parameters

Operating voltage: DC 12V

Display: 7.3-inch LED display

Size of dehydrated silver area: 166×68mm

Maximum power: 70W

Bluetooth speaker power: 4Ω/4.5W * 2

Case size: 226×156×15mm

Operation Instruction

On/off key: Press to turn on/off mirror light. Press and hold for infinity brightness changing.

Anti-fog key / pairing key: Click on the on/off anti-fog function, long press for 2 seconds or 4 seconds to enter Wi-Fi smart network distribution or compatible network distribution mode.

Bluetooth On/Off Key: Tap to turn on/off the Bluetooth function; press and hold for 3 seconds to turn off the display, and press and hold again for 3 seconds to turn it back on.

Play/Pause key: Tap pause/play music when playing music, tap answer when calling, long press for two seconds to reject the call.

Previous/Volume+: While playing music, tap to switch to the next song; long press to enter the volume adjustment mode, long press to quickly increase the volume in the volume adjustment mode, short press to increase the volume step by step. When Bluetooth is off, press briefly to cycle through the three light colors.

Next song/volume -: While playing music, tap to switch to the next song; long press to enter the volume adjustment mode, long press to fasten or decrease the volume in volume adjustment mode, short press to decrease the volume step by step. When Bluetooth is off, press briefly to cycle through the three light colors.

App Note

This module with the exclusive WiseMirror APP can easily configure the mirror weather module, such as connecting to a Wi-Fi router, setting local area and temperature unit settings, and can also view the real-time temperature of the room on the WiseMirror



广州先越宝仑电子科技有限公司

Adsmart Technology Ltd.

广州市番禺区番禺大道北555号番禺节能科技园天安总部中心15号楼408
Rm.408,Building 15,Headquarters Center,Tian An Hi-Tech Ecological Park,
No.555,Panyu Avenue N. , Panyu District, Guangzhou, China
Tel: 020-39218917-828 Fax: 020-3921-8997
<http://www.adsmart.com.cn>



APP.

IOS qr code

Google Play qr code

Mainland China Android qr code

Installation Note

1. Draw an area on the surface of the mirror mercury, the recommended size of the area is 166 x 68 mm, remove the mercury on the area, the content of the display will come out from the part of the mercury removed.
2. To install the module, first place the six buttons on the matching positioning plate, align the pattern of the buttons on the mirror surface with the mercury, then cover the positioning plate with the outer frame and glue to the mirror surface.
3. After gluing the outer frame, you can view the display effect from the front, no problem then glue around the outer frame to fix, and snap the module into the outer frame, screw on the fix.

Product View



广州先越宝仑电子科技有限公司

Adsmart Technology Ltd.

广州市番禺区番禺大道北555号番禺节能科技园天安总部中心15号楼408
Rm.408,Building 15,Headquarters Center,Tian An Hi-Tech Ecological Park,
No.555,Panyu Avenue N. , Panyu District, Guangzhou, China
Tel: 020-39218917-828 Fax: 020-3921-8997
<http://www.adsmart.com.cn>

